

Fig. 1


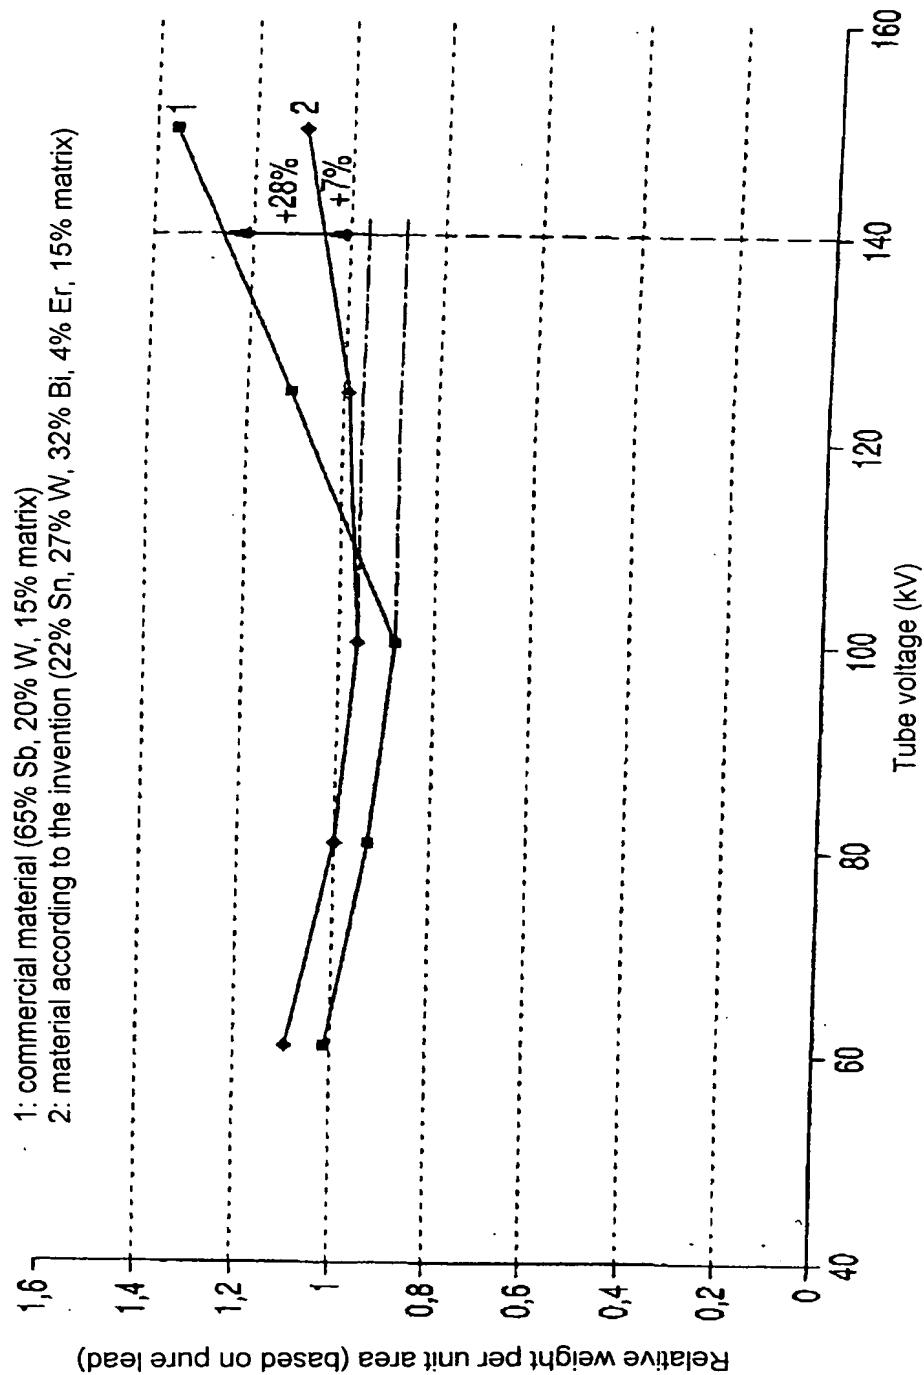


Fig. 2


1: commercial material (70% Sn, 10% Ba, 20% matrix)
2: material according to the invention (20% Sn, 36% W, 29% Bi, 15% matrix)

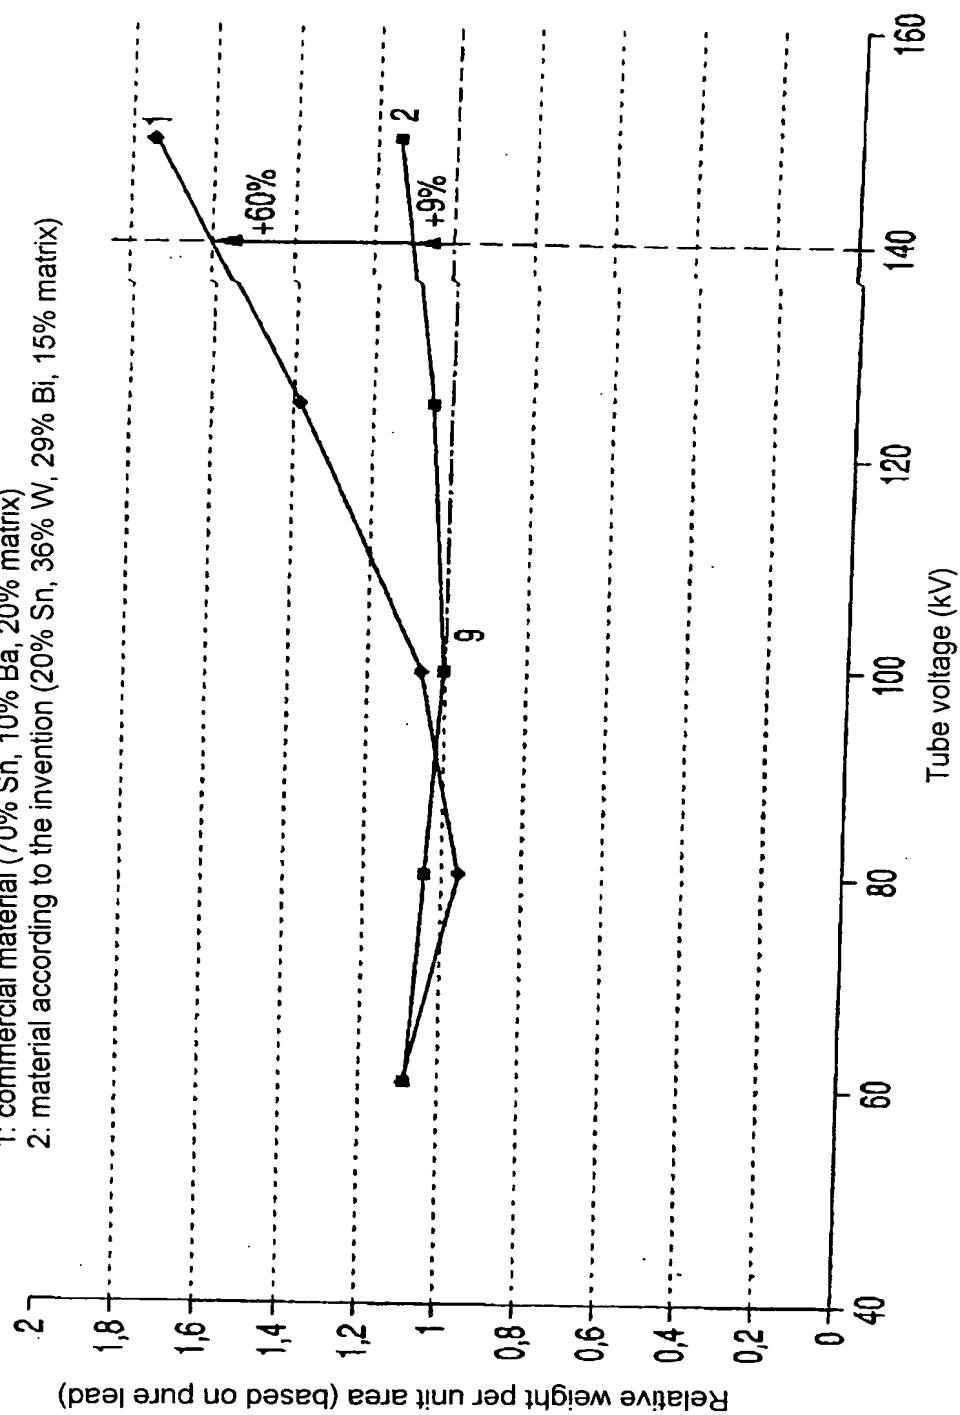

10/533322

3/4

Fig. 3

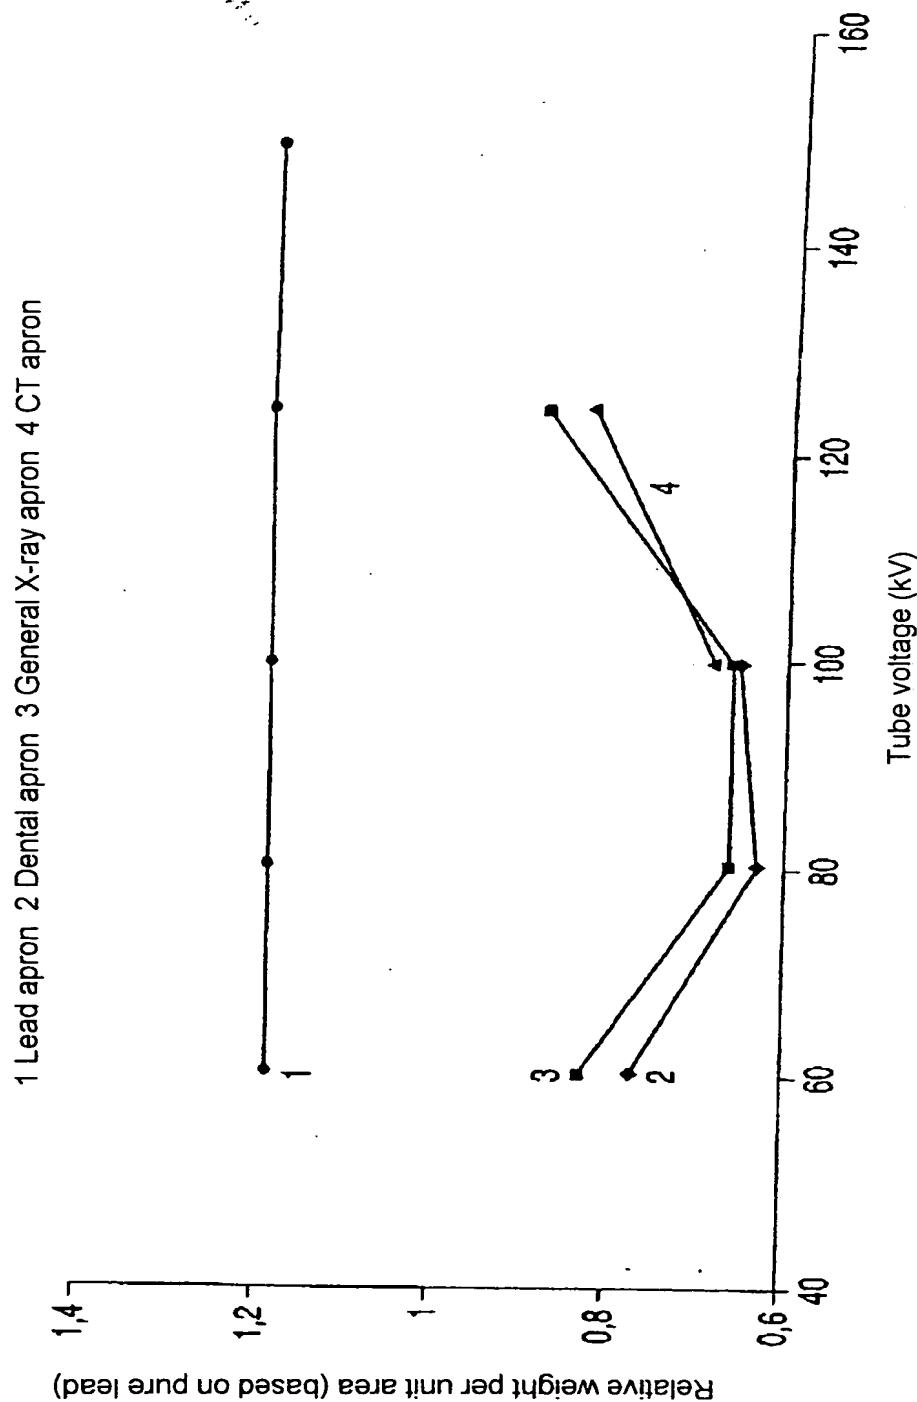

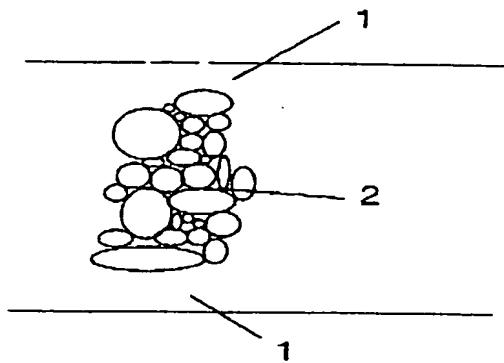


Fig. 4